

RoHS Compliant

3170 SERIES D-SUB CONNECTORS RIGHT ANGLE (MALE) (8.08mm FOOT PRINT)

MATERIAL

HOUSING: SEE ORDERING INFORMATION (UL94V-0)
 HOUSING COLOR: BLACK
 TERMINAL: COPPER ALLOY
 TERMINAL PLATING: SEE ORDERING INFORMATION
 SHELL: STEEL
 SHELL PLATING: SEE ORDERING INFORMATION
 HARPOON: BRASS, Sn PLATED

REV	DATE	DESCRIPTION	ECN NO.	NAME
A	97.12.15	NEW RELEASE		DEAN
D	04.06.07	ADD INSTRUCTION	AK0406007	XZ
E	04.07.03	MODIFICATION	AK0405025	XZ
F	04.11.04	ADD GREEN OPTION	AK0411003	LIUFAN
G	04.12.25	MODIFICATION	AK0412021	LIUFAN
H	05.06.21	ADD OPTION	AK0506021	LIUXIN
I	06.05.20	CHANGE SHOW	CECR06001320	Richard

ORDERING INFORMATION

* 3170 - ** M * * * * *

09,15,25,37

" ":NORMAL PRODUCT

△ "G":GREEN PRODUCT

A:WITH HARPOON GROUND BRACKET & #4-40 UNC THREAD RIVETED INSERT

B:WITH HARPOON GROUND BRACKET & JACK SCREW

SHELL PLATED&HOUSING MATERIAL

T: Sn; THERMOPLASTIC
 N: Ni; THERMOPLASTIC
 △ A: Ni; HIGH THERMOPLASTIC
 △ B: Sn; HIGH THERMOPLASTIC




S1:1u" Au
 S2:5u" Au
 S3:10u" Au
 S4:15u" Au
 S5:30u" Au
 S6:3u" Au
 (SELECTIVE Au)
 F1:1u" Au
 F2:5u" Au
 F3:10u" Au
 F4:15u" Au
 F5:30u" Au
 F6:3u" Au
 (FULL Au)

W:WIESON LOGO
 N:NO LOGO

X:WITHOUT JACK SCREW
 (ONLY FOR "A" TYPE) △


S:LOCK GSS6-A47511848 LONG: 11.8mm
 2:LOCK GSS6-A47513058 LONG: 13.0mm
 D:ATTACH GSS6-A47511848 LONG 11.8mm

(ONLY FOR "A" TYPE) △
 E:ATTACH GSS6-A47513058 LONG 13.0mm
 (ONLY FOR "A" TYPE) △

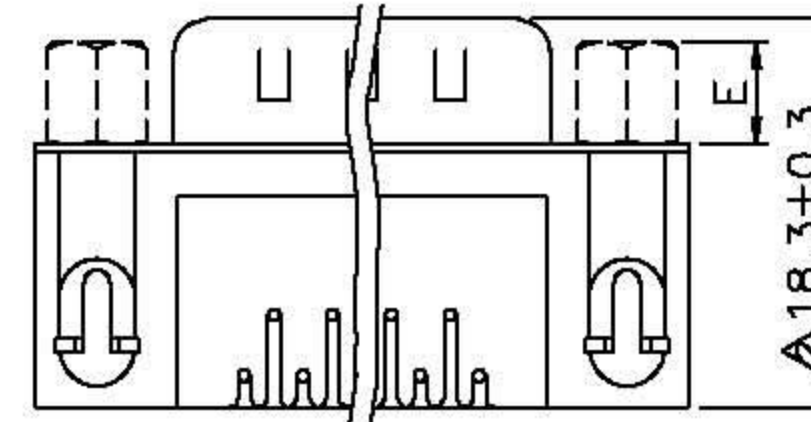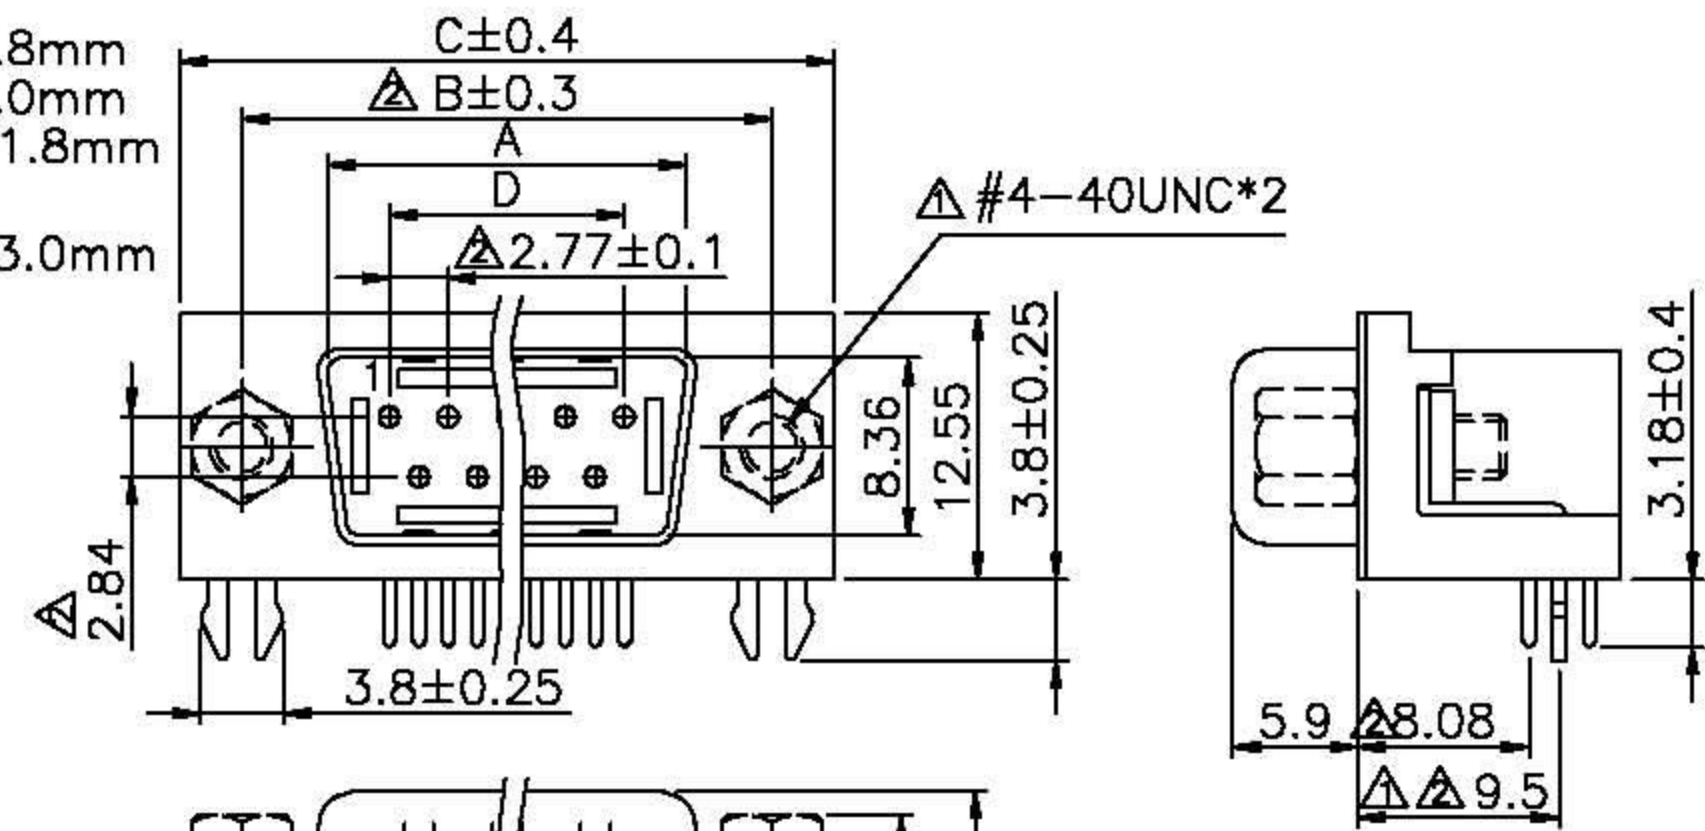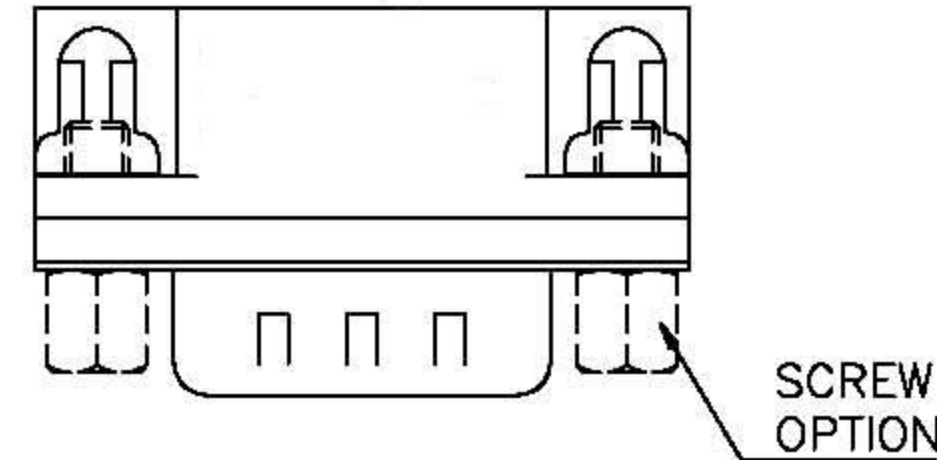

	E	INNER SCREW THREAD	OUTER SCREW THREAD
S:GSS6-A47511848	4.8	#4-40 UNC	#4-40 UNC
2:GSS6-A47513058	5.8	#4-40 UNC	#4-40 UNC

PCB EDGE

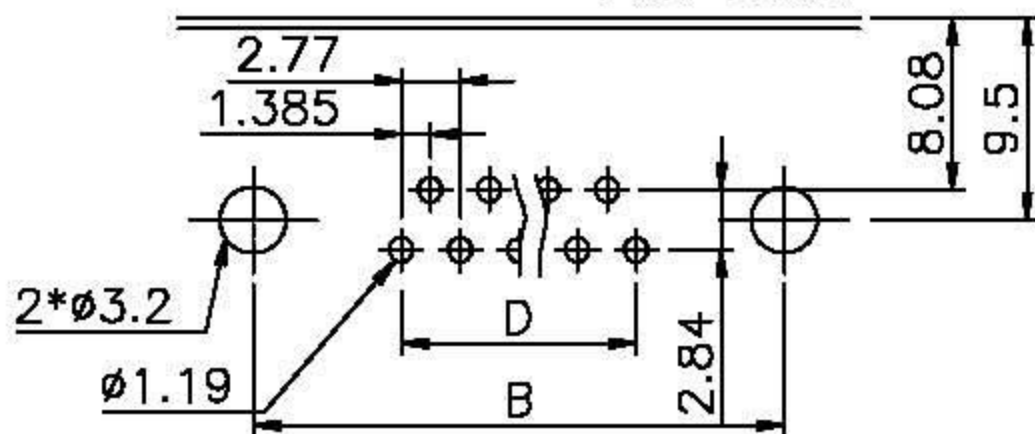

RECOMMENDED P.C.BOARD LAYOUT

RS P/N	NO. OF CONTACTS	A	B	C	D
4883887	09	16.92	24.99	30.80	11.08
4883900	15	25.25	33.32	39.10	19.39
4883922	25	38.96	47.04	53.00	33.24
	37	55.42	63.50	69.32	49.86

NOTE: P.C.B LAYOUT TOLERANCE:±0.05mm

GENERAL TOLERANCE		PART NO.:	
± 0.20 mm		RS - *****	
GENERAL ANGLE TOLERANCE		DRAWN BY	DEAN(WST)
±3'		CHECKED BY	KEVIN
		APPROVED BY	JERRY
		DRAWING NO.	3170-002
		DRAWING SIZE	A4
		UNIT	mm
		PAGE	1 OF 1
		SORTING NO.	△P11990/CA0054(WSC)△△

ISSUED

[ARTICLE:044033 V4]